

PERFORMANCE. RELIABILITY. VALUE.



THE HUSTLER EXPERIENCE.

FIRST, WE CHANGED EVERYTHING

In 1964, Hustler invented the first zero-turn mower. While the rest of the world has played catch-up, our innovative spirit has kept us at the front of the mower industry for nearly 50 years. Today we design and build the fastest and toughest zero-turn mowers in the commercial mowing industry. From the versatile TrimStar to the powerful Super-Z, when you mow with a Hustler, you're riding a revolution.



1961 Roy Mullet joined the company. His vision and entrepreneurial spirit was a catalyst for the company. Later that same year, he was appointed the president by the Board of Directors.



1963 Excel Industries, Inc. started building cabs for after-market farm equipment. Later, contracts were signed with original equipment manufacturers (O.E.M.s) of farm and construction equipment to provide needed cabs.



1964 Model 36; The world's first zero-turning radius lawn mower.

THE THREE EXCEL PIONEERS On the left, Ray Rilling, hydraulics expert, with company President Roy Mullet and John Regier, who brought the idea of the first up-front, independent drive-wheel-steering Hustler mower to Excel.



1966-67 Model 172; The first in our line of industrial-grade mowers with a 72" deck.



1970-74 Model 272; Introduced in February 1970, the Hustler 272 used the first dual-hydrostatic drive system ever developed for a mower.

Constantly monitoring the market in the late 60's, cab manufacturing showed signs of change. Excel started to take a strong foothold into the turf and grounds market.



1975 Model 272 A

In the 1970s, Hustler switched from red to the signature yellow paint color.



1978 Model 360; Hustler introduced the first self-leveling, hillside mower. Followed by the 402, the 602D, 640/6400 and the ATZ.

1978 Model 275; The 275 firmly established our reputation for durability, dependability and longevity. The 275 permanently raised the bar for what would be expected of a Hustler mower.

Hustler Turf Equipment was born of a simple need - a mower that would maneuver the irregular landscape of the family home - complete with bird baths, gardens, and winding front walkways.

The first Hustler was a hodgepodge of mower parts and farm machinery, created by a genius named John Regier. Mr. Regier's mower cut grass and steered like no other. It could hug a flag pole or reverse directions at a fence line, with a turn radius of zero degrees. With this, the world's first zero-turn mower was born. And it changed everything.

When Mr. Regier brought his design to tractor cab manufacturer Excel Industries, the timing was perfect.



Hustler was the first mowing company with a full range of attachments for increased productivity.

1978 Model 285 showing its multi-seasonal versatility.

1985 Kent Henson named President.

1985 To increase mowing productivity and minimize costs was the rationale behind the Range Wing, the first tractor-mounted wide-area mowing system.



1985 Model 250 - the first rear discharge, mid-mount zero-turn rider. It featured a unique catching system which essentially could not plug.



1991 Paul Mullet, second generation, named President. The company is now into its third generation.

1997 The ShortCut was a stand-up or sit-down zero-turn rider designed to be more compact and more productive.

"OUR MISSION IS TO PROVIDE THE MOST DEPENDABLE, USEFUL AND TIME-SAVING PRODUCTS IN LAWN CARE."

He couldn't maintain production alone, and Excel was looking to expand its product line. When the folks at Excel saw the mower in action, they knew they had a product that would revolutionize the mowing industry. Under the direction of company president Roy Mullet, Excel began production of Hustler mowers at its plant in Hesston, Kansas.

Since then, Hustler has become one of the leading turf care brands in the world. Across the globe, the Hustler brand signifies innovation, quality and superior customer care.

In addition to manufacturing the best-in-class mowers, Hustler is committed to providing a quality owner experience. Our mission is to provide the most dependable, useful, and time-saving products in lawn care, while providing unmatched customer loyalty and the best warranty in the business.

growing Hustler family now includes more than 1,200 U.S. dealers and more than 40 distributors worldwide.

Hustler's experienced dealers are always ready to answer questions and provide expert service to every customer. The



1999 Our first commercial walk-behind mower was the Hydro Walkbehind - it featured an innovative steering system that is much easier to learn and operate than traditional pistol-grip.



2000 Hustler Z; In May, Hustler began to design a Z-rider to compete in the marketplace. In September of that same year, we debuted the Hustler Z and began the modern era of Hustler Turf Equipment.



2001 With the introduction of the Super Z, Hustler sped to a position of one of the leaders of the mowing industry.

2001 In 2001, Hustler came full circle when we introduced the FasTrak - a residential Z-rider.



2008 Hustler Turf introduced the world's first all electric zero-turn mower

2008 Our first golf course mower was the Model 7700 fairway mower. Also introduced at that time, the walk-behind greens mower Model 50.

TOUGHER. FASTER. SMOOTHER.

WHY HUSTLER IS A BETTER MOWER



THE HUSTLER DECK

Our deck is engineered to provide a clean, finished look every time, with even distribution of grass clippings.

LOWER CENTER OF GRAVITY

A reduced profile translates into tighter handling and stability.

SIMPLE DESIGN

Fewer parts means fewer problems and easier service.



SMOOTHTRAK™ STEERING

It's what makes driving a Hustler a better experience. Our mowers have the smoothest and most precise steering in the industry. You'll glide around obstacles and make zero-radius turns with ease.



PARK BRAKE SYSTEM

Simple, convenient and patented system that automatically engages when you open the steering levers.



STRONGER FRAME The Hustler frame is one solid part, from front fork to rear bumper. There are no bolts holding it together like our competitors' products.



EASY SERVICE POINTS We design our mowers with practicality in mind. Exposed access points make servicing a Hustler easier. Oil filter and drain can be tended with a single pan, with no danger of fluids spilling on belts.

THE OWNERSHIP EXPERIENCE

FOUR BENEFITS OF OWNING AND OPERATING HUSTLER MOWERS

1

WE LISTEN TO OUR CUSTOMERS

What do people want? Why do they want it? And how can we make it happen for them? We listen to the operators out in the field and we address the issues they face every day. Our streamlined production process allows us to make improvements and fix problems – quickly.

3

HUSTLER MOWERS ARE TOUGH. AND THEY PROVE IT

Once we've designed a mower we love, we start abusing it. We rigorously test every model, leaving nothing to chance. Our mowers meet our self-imposed expectations that are higher than industry standards. Hustler owners can rely on their mowers to be the toughest, most dependable in the field.

Our testing includes:

- Shake test
- Engine diagnostics
- Stress tests
- Safety tests
- Mow quality
- Noise testing
- ROPS certification
- Projectile tests
- Field testing

2

WE INTEGRATE EXCELLENCE

Our deck team studies, tests and engineers the best designs for cutting grass and dispersing clippings. Our power train team mounts the best engines, transmissions and pumps on our mowers. Then our integration team brings it all together, assuring you that all systems work seamlessly. We're all specialists with a common goal: delivering the best mower in the world to our customers.

4

THE HUSTLER OWNER EXPERIENCE

When you buy a Hustler, you're buying a deluxe experience. We want our customers to have the best mower and we'll do what it takes to keep them coming back. Hustler sales and service personnel are experts on our machines. Best of all, when you buy a Hustler you always have a go-to dealer network if you ever have a question about your mower. We may be in the mower business, but the most important thing we build is relationships.



VX4 TECHNOLOGY

V1 VERSATILITY - Adjustable front inner wall allows deck performance to be optimized for all grass conditions and seasons.

V2 VELOCITY - The progressively larger tunnel in front of the blades, and a wider discharge opening, moves grass through the deck faster resulting in greater discharge dispersion.

V3 VOLUME - Higher air and grass volume throughput results in less material carried in the cutting chambers. This allows for higher ground speed without compromising cut quality.

V4 VACUUM - The grass is lifted more effectively. This results in a crisp, clean cut and appearance every time.

"The VX4 deck has exceptional discharge and an excellent cut. Its ability to disperse even wet grass is the best I have seen. With constant challenging cutting conditions, I have been able to save time and effort and still produce an excellent end product. Hands down, the best deck on the market!"

- Gerry Couture, South Burlington, VT

ANOTHER INNOVATIVE IDEA. ANOTHER BEAUTIFUL HUSTLER LAWN.



Information is based on the 60" deck

THE SUPER Z & X-ONE CONTAIN VX4 TECHNOLOGY

- A** .375 thick discharge plate braces the discharge opening from impact
- B** 7 gauge top doublers - (spindle reinforcement) .42 mount thickness
- C** .25 thick ribs provide continuous front-to-back bracing
- D** Increased idler and drive pulley diameters to accommodate higher horsepower engines
- E** 7 gauge outside wrappers (skirt)
- F** 11 gauge bottom doubler ties spindle mounts together to resist spindle impacts

NEW HUSTLER DECK TECHNOLOGY IS A CUT ABOVE THE INDUSTRY

- G** .375" thick anti-scalp wheel mounts
- H** Front wall box section creates a side-to-side (lateral) beam that resists front impacts and keeps deck flat. Anti-scalp wheel pockets are heavily reinforced to protect anti-scalp wheels and deck.
- I** Replaceable rubberized skid-pad
- J** Standard recessed anti-scalp wheels
- K** Adjustable inner-wall baffles
- L** Industrial ductile-iron spindle with 1.5" shaft diameter
- M** Larger discharge opening with high density rubberized discharge chute for greater discharge dispersion
- N** Optional anti-scalp wheels (not shown here)
- O** Large tunnel in front of the blades increases discharge capacity

With the groundbreaking innovation behind the Super Z™, Hustler has created a new category:

Industrial Grade. Others will claim to have durable mowers . . . but there is only one Hustler

Industrial Grade.

I N D U S T R I A L

HYPERDRIVE™


INDUSTRIAL HYDRO SYSTEM

TRY TO PUSH IT TO THE LIMIT. WE DARE YOU.

While regular intense use will break down other mowers' parts, the HyperDrive system is engineered to handle thousands of hours of the toughest jobs without degrading.


While others are red-lining, the Super Z is comfortably cruising. We've added a bigger reservoir with new slipper-piston pumps to make our Hustler Industrial-Grade mowers the most durable in the industry.

WARRANTY
5 YEAR | 3000 HOUR
PUMPS AND MOTORS

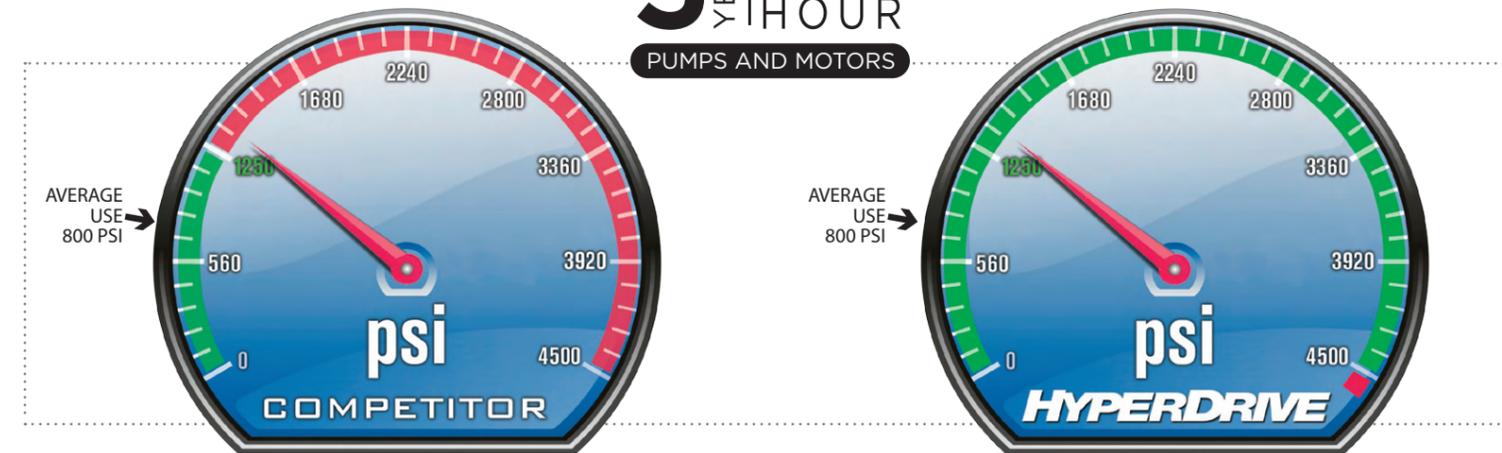

UNDER AVERAGE USE OF 800 PSI, COMPETITIVE UNITS ARE WORKING 356% HARDER THAN OUR HYPERDRIVE™ HYDRAULIC SYSTEM.

FIVE COMPONENTS THAT MAKE THE HYPERDRIVE SYSTEM BETTER

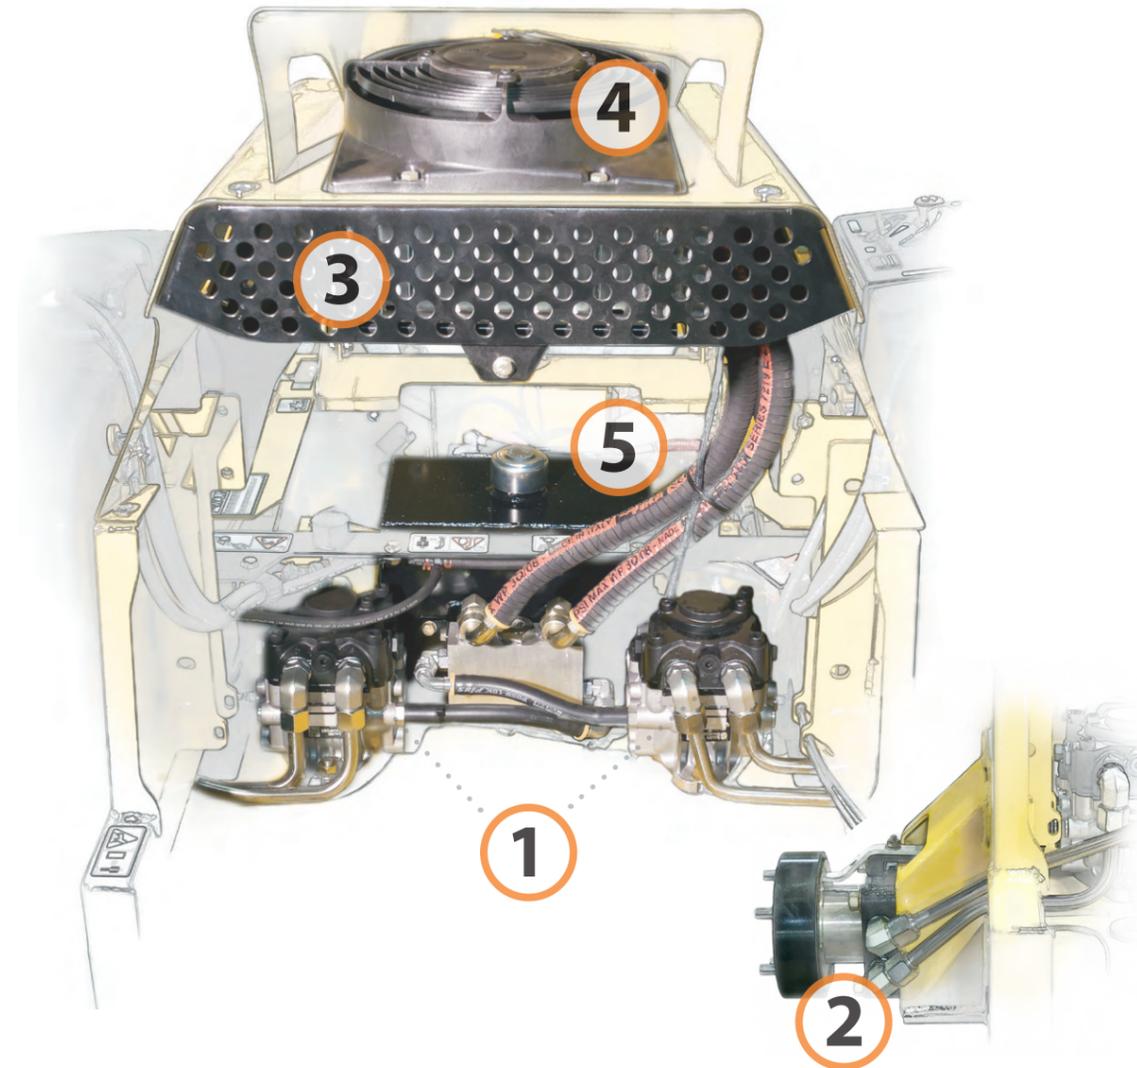

- 1 **PUMPS** - Sauer Danfoss DDC-20. Two variable displacement, industrial grade slipper piston pumps. Each pump powers one drive-wheel. All stainless-steel, high-pressure lines with Parker SealLok™ O-Ring Face-Seal fittings.
- 2 **WHEEL MOTORS** - Parker TG0280 utilizing a patented extra heavy duty torque link with a 60:40 spline geometry. The wheel motor has an added pressurized shuttle that routes hot oil to the cooling system, regulating temperatures for increased life and performance.
- 3 **OIL COOLER** - High capacity 3" thick, 10" x 10" aluminum oil cooler with filter screen.
- 4 **FAN** - 12 volt, 9" fan with an integrated shroud pulls air through 100% of the oil cooler surface.
- 5 **RESERVOIR** - Large 3 US gal. (11.36 L) with easy maintenance threaded filter and drain plug. Increased micron count filter for cleaner running system.

SUPER Z



Super Z

INTRODUCING A WHOLE NEW CATEGORY.

The Hustler Super Z™ is in a class by itself. Literally. The Industrial-Grade Super Z is built like a tank and rides like a thoroughbred - with a top speed of 15 mph. The new HyperDrive™ hydraulic system is engineered to run at higher psi levels than any other mower on the market. Its VX4™ deck technology delivers a clean cut and finish that complements its industrial muscle. The Super Z is backed by Hustler's longer Industrial-Grade warranty, not found on any other zero-turn mower. When you want the toughest, most capable mower, climb aboard the Super Z.

Super Z

VX4 TECHNOLOGY HYPERDRIVE INDUSTRIAL HYDRO SYSTEM



- Standard foldable certified ROPS and seat belt
- Kawasaki FX, Kohler Command & EFI engine models
- 12-gallon fuel capacity with built-in sight line
- 24" drive tires
- Welded steel decks. NOT STAMPED!
- Super deluxe seat with armrests OR molded vinyl suspension seat with armrests. Fore and aft adjustment.
- Cutting heights from 1" to 5.5"
- Toughest frame, front forks and deck in the industry
- 13" no flat semi-pneumatic caster tires

ADDITIONAL FEATURES

- HyperDrive™ hydro system - industrial grade pumps and motors
- NEW 60", 66" & 72" side discharge decks with VX4™ technology
- 60" & 72" rear discharge decks
- Simple design
- SmoothTrak Steering - responsive precise control
- Kohler/Kawasaki engine options up to 37 HP
- 15 MPH

ACCESSORIES

- Mulch Kit
- 3-Bag Catcher
- Steering Extension Kit
- Wavy Blades
- Gator™ Blades
- Flex Forks™
- Hydraulic Deck Lift Kit
- Light Kit
- Stripe Kit
- Hitch Kit
- Sand Kit
- Optional Rear Anti-Scalp wheels



"I mowed with five different mid-mount mowers before I bought my Super Z. In my opinion, Hustler is number one. A lot of thought and engineering was put in this product." - S. Mueller, Swansea, IL

THE FASTEST, MOST DURABLE ZERO-TURN MOWER EVER BUILT
CLIMB ABOARD THE ULTIMATE CUTTING MACHINE

CONFIGURATION QUICK GUIDE

See page 31 for full mower specifications.

SUPER Z			
MODEL	ENGINE	DECK SIZE	DISCHARGE
KOHLER	27 HP	60	SIDE/REAR
KOHLER EFI	29 HP	60	SIDE/REAR
KAWASAKI	31 HP	60	SIDE/REAR
KAWASAKI	37 HP	60	SIDE
KOHLER EFI	29 HP	66	SIDE
KAWASAKI	37 HP	66	SIDE
KOHLER EFI	29 HP	72	SIDE
KAWASAKI	31 HP	72	SIDE/REAR
KAWASAKI	37 HP	72	SIDE

WARRANTY
5 YEAR | **3000** HOUR
PUMPS AND MOTORS

LIMITED
LIFETIME WARRANTY
FRAME & LEADING EDGE OF DECK

3 YEAR | **NO** HOUR LIMIT | **OR** **5** YEAR | **500** HOUR
LIMITED WARRANTY | LIMITED WARRANTY

See your local Hustler dealer for complete warranty information.

WHAT'S IN A NAME

Excel Industries christened its zero-turn mowers "Hustler," a name belonging to the B-58 fighter-bomber. Because of the unique characteristics of the zero-turn mower and its potential impact on the mowing industry, it was important to have a name that carries a message, not unlike the B-58. It's fast. It's powerful. It's a Hustler.



THE HUSTLER
B-58



Our machines mow down grass and competitive mowers with equal dominance. When your livelihood depends on your mower, it pays to own the best. With innovative features you won't find on other machines, a Hustler is capable of leaving a trail of professionally cut grass and inferior mowers in its wake.

C O M M E R C I A L



X-ONE



THE NEW HUSTLER X-ONE CHEWS UP THE BIGGEST JOBS-AND SPITS THEM OUT IN UNIFORM CLIPPINGS.

We designed the X-ONE™ mainframe with heavy-gauge rectangular tubing for strength. Then we narrowed the body, allowing the X-ONE to carry three different deck sizes to meet any user's needs. With a top speed of 11 mph, the X-ONE makes quick work of the largest jobs. With VX4™ deck technology and SmoothTrak™ Steering, you get an ultra-clean cut and the famous Hustler feel, unparalleled in the zero-turn industry. With the perfect combination of power and versatility, the X-ONE can do it all.



Deluxe vinyl seat with armrests. Fore and aft sliding adjustment.

Cutting heights from 1" to 5.5"

Toughest frame, front forks and deck in the industry

Standard foldable certified ROPS and seat belt

Kawasaki FX and Kohler Command engine models

10.4-gallon fuel capacity with built-in sight line

23" or 24" drive tires, 13" caster tires

Welded steel decks. NOT STAMPED!

ADDITIONAL FEATURES

- PROVEN separate pumps and motors
- NEW 48, 54, 60 side discharge decks with VX4™ Technology
- 54, 60 rear discharge decks
- Up to 31 HP
- 11 mph

ACCESSORIES

- Mulch Kit
- 3-Bag Catcher
- Steering Extension Kit
- Wavy Blades
- Gator™ Blades
- Flex Forks™
- No-Flat Caster Tires
- Suspension Kit for Seat
- Light Kit
- Stripe Kit
- Hitch Kit
- Sand Kit
- Optional Rear Anti-Scalp wheels

"This machine has an incredible cut. In our region, we experience heavy morning dew and as a contractor, it was great to have a machine that worked well in all conditions. The VX4 outshined our other units hands down. On rain days, I would give the guys the day off, just so I could take out the Hustler and leave the 'competitor' on the trailer."

- David Wimble, Moretown, VT



THE STRENGTH OF VERSATILITY
THE ONE MOWER THAT CAN DO IT ALL

CONFIGURATION QUICK GUIDE

See page 32 for full mower specifications.

X-ONE

MODEL	ENGINE	DECK SIZE	DISCHARGE
KAWASAKI	24 HP	48	SIDE
KAWASAKI	24 HP	54	REAR
KOHLER	25 HP	48	SIDE
KAWASAKI	26 HP	54	SIDE
KOHLER	27 HP	54	SIDE
KAWASAKI	31 HP	54	SIDE
KAWASAKI	26 HP	60	SIDE/REAR
KAWASAKI	31 HP	60	SIDE
KOHLER	27 HP	60	SIDE



2 YEAR LIMITED WARRANTY | NO HOUR LIMIT | OR 5 YEAR LIMITED WARRANTY | 500 HOUR

See your local Hustler dealer for complete warranty information.

WE'RE SERIOUS.

When it comes to building commercial and industrial grade mowers, we don't mess around. We build our mowers to the highest standards - using the toughest parts and our own industry-leading, proprietary technology. Then we integrate every system to make the smoothest-riding and most dependable mower on the market. If your livelihood depends on your mower, get the best. Get a Hustler.

X-ONE





DIESEL Z

Hustler Z
DIESEL

**DIESEL POWER TO DO ANY JOB. HUSTLER
QUALITY TO DO ANY JOB BETTER.**

For operators who want the convenience of a diesel-fueled mower, the Hustler Z™ Diesel has the high-torque power to get the job done. The Z Diesel's heavy-duty 25 hp engine is positioned over the drive tires, distributing weight where it's most productive. A compact frame and low center of gravity give this mower increased stability. Boasting a top speed of 12 mph and Hustler's proprietary SmoothTrak™ Steering, the Hustler Z Diesel works hard and works fast, making it a great addition to any commercial fleet.

Hustler Z DIESEL



Standard foldable certified ROPS and seat belt

25hp Shibaura liquid-cooled diesel engine for increased engine life

14.4-gallon fuel capacity

24" drive tires, 13" caster tires

Welded steel decks. NOT STAMPED!

Suspension, molded-vinyl, adjustable seat with armrests. Fore and aft adjustment.

Cutting heights from 1" to 5.5"

Toughest frame, front forks and deck in the industry

"I've had a great experience with the Hustler Diesel Z. I cut about 15 acres and the cut quality is excellent. I tried out a competitive model and it was a good machine but the cut quality didn't come close to the Hustler."
- W. Bissonette, Williston, FL



CONFIGURATION QUICK GUIDE

See page 33 for full mower specifications.

DIESEL Z

MODEL	ENGINE	DECK SIZE	DISCHARGE
SHIBAURA	25 HP	54	SIDE
SHIBAURA	25 HP	60	SIDE/REAR
SHIBAURA	25 HP	66	SIDE
SHIBAURA	25 HP	72	SIDE/REAR

ADDITIONAL FEATURES

- 54", 60", 66" & 72" side discharge XR-7™ decks
- 60 & 72 rear discharge decks
- Clean, compact design. Much more compact than competitive units
- Engine mounted sideways for serviceability and compactness
- Patented belt drive system provides up to 3X longer belt life

ACCESSORIES

- Over 18,000 fpm blade tip speed - superior quality of cut
- Wide stance, low center of gravity for increased stability
- Simplest maintenance in the industry - no daily lube points
- Over-center, molded-rubber discharge chute folds up out of the way
- 12-mph top speed—get the job done fast

- Mulch Kit
- 3-Bag Catcher
- Steering Extension Kit
- Flex Forks™
- Light Kit
- Stripe Kit
- Hitch Kit
- Hydraulic Deck Lift Kit

THE CONVENIENCE AND POWER OF DIESEL FITS YOUR FLEET AND EXCEEDS EXPECTATIONS



2 YEAR | **NO** OR **4 YEAR** | **500**
HOUR LIMIT | LIMITED WARRANTY | LIMITED WARRANTY

See your local Hustler dealer for complete warranty information.

AMERICAN QUALITY

At Hustler, American workers build the best mowers on Earth. From engineering to assembly to our trademark yellow finish, we do it all from our headquarters in the Heartland. We combine the American innovative spirit with a do-it-right ethic to produce the best zero-turn mower money can buy. That's the way we've done it for nearly 50 years, and we plan to keep it that way.



HESSTON
KANSAS

M A D E I N U S A



TRIMSTAR

TrimStar

WITH THE TRIMSTAR HYDRO, WE DEFINITELY WALK THE WALK

The TrimStar™ is the most innovative walk-behind machine in the professional mowing industry. Our patented H-Bar™ steering is the easiest-to-use walk-behind system in the field, reducing operator fatigue. The TrimStar is a unique machine on it's own, but it can fit nicely in a fleet when operators have hard to reach places that pose problems for conventional "Z" mowers. When it comes to commercial mowing, we walk the walk.

TrimStar



"I can not get over how easy and maneuverable this walkbehind is in tight places and how fast it is out in the open."
 - K. Bonin, Lafayette, LA

FEATURE-RICH AND STRONG AS A BULL
 INNOVATION HITS THE GROUND WALKING

CONFIGURATION QUICK GUIDE

See page 34 for full mower specifications.

TRIMSTAR

MODEL	ENGINE	DECK SIZE	DISCHARGE
KAWASAKI	16 HP	36"	SIDE
KAWASAKI	18 HP	48"	SIDE
KAWASAKI	20 HP	54"	SIDE
KAWASAKI ES*	24 HP	54"	SIDE

* Electric Start

ADDITIONAL FEATURES

- 36", 48" & 54" side discharge decks
- Patented H-Bar™ steering system - the easiest to learn, easiest-to-use walk-behind steering system. The mower glides over the lawn effortlessly
- Optional electric start 54"

- No daily lube points
- Superior drive system - integrated, serviceable ZT2800 transmissions
- Best blade-spindle design in the industry
- Features a wide stance for increased stability

ACCESSORIES


- Mulch Kit
- Roll-On™ Striping Sully (available for 48" or 54" decks)
- Deck Mounted Catcher
- Wavy Blades
- Gator™ Blades



See your local Hustler dealer for complete warranty information.

GREAT PEOPLE MAKE GREAT MOWERS

It's no coincidence that our particular workforce is responsible for Hustler's success. Hustler employees are not cogs on an assembly line; they're artisans, each practicing his or her specific craft. Our people thrive in Hustler's innovative environment. The proof is in Hustler's incredible track record of employee longevity. The people who put your mower together have an average of 8 years experience with only a four percent turnover rate. Almost a fifth of our workforce has been here 20 years or more. Every day, they work with a passion towards our mission. Through innovation, craftsmanship and hard work, the people at Hustler produce better mowers than anyone.

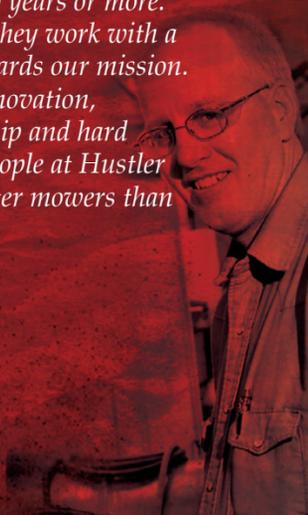



HUSTLER SUPER Z

with HYPERDRIVE HYDRO SYSTEM
and VX4 TECHNOLOGY

ENGINE SPECS

Kawasaki FX	31 HP
Kawasaki FX	37 HP
Kohler Command	27 HP
Kohler Command EFI	29 HP

Starter 12-volt

Ignition Electronic

Charging System 12-volt (see engine manufacturer specs)

Fuel Unleaded gasoline (see engine manufacturer specs)

Fuel Filter Replaceable, automotive-type

Air Filter Heavy-duty air cleaner to extend the service interval for excessive, dirty applications and improved performance

Cooling Air cooled. Fly-wheel fan

Governor Mechanical

TRACTION DRIVE SYSTEM

Type Dual hydrostatic. Individual pumps power two direct-drive wheel motors. Hydrostatic system operates on 15W50 Mobil 1 synthetic motor oil. Transmission drive (oil) cooler for increased system life.

Pumps Two variable displacement, slipper piston pumps. Each pump powers one drive-wheel. Sauer Danfoss DDC-20

Pump Drive B Section V-belt drive from engine crankshaft. Large pulley and idler diameters for longer belt life.

Hydraulic Lines Stainless-steel, high-pressure lines with Parker SealLok™ O-Ring Face-Seal fittings.

Cooling Large capacity cooler with 9 inch fan for extended hydraulic life

Final Drive Direct-drive high-torque wheel motors. One for each drive wheel. Parker TGO280 with hot oil shuttle

Filter Internal

Ground Speed Infinitely variable: 0-15 mph (0-22.53 kph) forward, 0-7.5 mph (0-12.07 kph) reverse

Steering SmoothTrak™ twin-lever steering provides independent control of each drive wheel. Speed, forward, reverse, brake, and turns are all controlled with hand-operated controls

31

Turning Radius True zero turning radius. Turns within its own length. Counter-rotating, independent drive wheels

Brakes

Service: Hydrostatic dynamic braking

Parking: Automotive-style drum brakes. When steering levers are placed in neutral position, integral park brakes are automatically engaged

Tires Front: 13 x 6.50 – 6, smooth tread, semi pneumatic
Drive: 24 x 12 – 12, turf tread

Capacities Fuel System: 12 US gal (45.4 l)
Hydraulic Oil: 3 US gal (11.36 l)

GENERAL INFORMATION

Safety Features Standard foldable ROPS with seat belt.

Operator presence system connected to seat, deck clutch and park brake switches. Stabilizer wheels at rear of lawn mower.

Side discharge deck with discharge chute and rear discharge deck with deflectors.

Seat Super deluxe seat with armrests. Fore and aft adjustment. OR Molded vinyl suspension seat with armrests Fore and aft adjustment.

Construction Main frame is 1.5 in x 3 in x .187 in (3.8 cm x 7.62 cm x .47 cm) rectangular steel tubing with internal gusset in frame bend. Drive motors mounted to 7 ga (.45 cm) welded steel. Front caster wheels mounted with ball bearings on each wheel. Front caster forks are .5 in (1.27 cm) steel

Controls Hand-operated choke, throttle, ignition switch, electric mower clutch. Integrated parking brakes

Indicators Hour meter, engine warning light

Cup Holder Cup holder molded into the left side fuel tank. Accommodates nearly any cup size.

DIMENSIONS

Height 54 in (137 cm) ROPS folded down
71.5 in (181.6 cm) ROPS up

W/60 in Deck

Length: 84.5 in (214.6 cm)
Overall width: 66 in (167.6 cm) w/discharge chute up
Tire-to-tire width: 57 in (144.78 cm)

Weight: 1515 lbs (687.2 kg)

W/66 in Deck

Length: 85.0 in (215.9 cm)
Overall width: 72 in (182.88 cm) w/discharge chute up
Tire-to-tire width: 60 in (152.4 cm)

Weight: 1560 lbs (707.6 kg)

W/72 in Deck

Length: 86.7 in (220.2 cm)
Overall width: 78 in (198.12 cm) w/discharge chute up
Tire-to-tire width: 60 in (152.4 cm)

Weight: 1600 lbs (725.75 kg)

DECKS

Side-Discharge 60", 66" or 72"

Rear-Discharge 60, 72"

Type Free-floating deck using three blades with center blade to the front. Mower deck is suspended at the corners. Includes 3 standard deck-mounted rollers to improve flotation in rolling and uneven terrain.

Deck Lift Raise and lower deck from driver's seat with simple foot-operated deck height adjustment. Pin for setting height, transport position. Change cutting heights, climb curbs and trailer more easily.

Construction Welded steel. Solid 1.5 in x .375 (2.55 cm x .95 cm) steel bars reinforce impact areas on trim edges. Commercial style, box section reinforced front edge. Reinforcements welded onto spindle mount areas. High density, rubberized discharge chute.

Cutting Heights Foot-operated deck height adjustment. Pin for setting height, detent for transport position. Height adjustment in .25 in increments from 1 in to 5.5 in (2.55 cm to 13.97 cm).

Mowing Blades Heavy-duty, heat-treated, high-lift steel Fusion™ blades. Fusion blades feature an exclusive electro-fusion technology that creates an ultra-hard layer at the blade's cutting edge, the blade remains sharp and continues to give a clean cut far longer than any blade on the market.

60 in: 20.50 in x 3.00 in x .250 in blade, extra high sail
66 in: 22.50 in x 3.00 in x .250 in blade, extra high sail
72 in: 24.50 in x 3.00 in x .250 in blade, extra high sail

Blade Tip Speed

Side-Discharge	Rear-Discharge
60 in: 18,630 fpm	60 in: 18,630 fpm
66 in: 18,230 fpm	-
72 in: 18,530 fpm	72 in: 18,040 fpm

Deck Drive Single V-belt drive from engine with electric clutch to all three spindles. Spring tension idler and large pulleys to extend belt life.

Spindles Ductile iron casting with steel shafts and sealed ball bearings

Width of Cut

Side-Discharge	Rear-Discharge
60 in: 59.25 in (150.5 cm)	60 in: 59.10 in (150.11 cm)
66 in: 65.25 in (165.7 cm)	-
72 in: 71.25 in (180.9 cm)	72 in: 69.20 in (175.77 cm)

Trim Capacity (left side)

Side-Discharge	Rear-Discharge
60 in: 2.5 in (6.35 cm)	60 in: 1.0 in (2.54 cm)
66 in: 4.0 in (10.16 cm)	-
72 in: 8.0 in (20.32 cm)	72 in: 4.5 in (11.43 cm)

Specifications subject to change without notice. Go to www.hustlerturf.com for most current specifications.

ACCESSORIES

Catcher Commercial-duty, 12 bushel, rear-mounted, three-bag catcher

Mulch Kit Recycles clippings under deck allowing clippings to be cut and recut, then discharged down into the grass. Reduces handling of clippings, improves appearance, and recycles nutrients back to the soil.

Gator™ Blades Patented mulching blade design

Wavy Blades Improved performance for mulching

Flex Forks™ Shock-absorbing front caster wheel forks for a smooth ride and a smoother cut.

Other Accessories Hitch Kit, Light Kit, Hydraulic Deck Lift, Pneumatic Tire, Steering Lever Extension Kit, Rear Anti-Scalp wheel, Sand Kit, Stripe Kit.



CATCHER



FLEX FORKS

HUSTLER X-ONE

with VX4 TECHNOLOGY

ENGINE SPECS

Kawasaki FX	24 HP
Kawasaki FX	26 HP
Kawasaki FX	31 HP
Kohler Command	25 HP
Kohler Command	27 HP

Starter 12-volt

Ignition Electronic

Charging System 12-volt (see engine manufacturer specs)

Fuel Unleaded gasoline (see engine manufacturer specs)

Fuel Filter Replaceable, automotive-type

Air Filter Heavy-duty air cleaner to extend the service interval for excessive, dirty applications and improved performance

Cooling Air cooled. Fly-wheel fan

Governor Mechanical

TRACTION DRIVE SYSTEM

Type Dual hydrostatic. Individual pumps power two direct-drive wheel motors. Hydrostatic system operates on 20W50 motor oil.

Pumps Two variable displacement, axial-piston type. Each pump powers one drive-wheel motor. Hydro-Gear PK 12cc Pump

Pump Drive V-belt drive from engine crankshaft

Hydraulic Lines Stainless-steel, high-pressure lines with Parker Seal-Lok™ O-Ring Face-Seal fittings.

Final Drive Direct-drive high-torque wheel motors. One for each drive wheel. Parker TF0240

Filter Internal

Ground Speed Forward: Infinitely variable: 0-11 mph
Reverse: 0-6 mph

Steering SmoothTrak™ twin-lever steering provides independent control of each drive wheel. Speed, forward, reverse, brake, and turns are all controlled with hand-operated controls

Turning True zero turning radius. Turns within its own length. Counter-rotating, independent drive wheels

Brakes

Service: Hydrostatic dynamic braking

Parking: Automotive-style drum brakes. When steering levers are placed in park position, integral park brakes are automatically engaged.

Tires

Front: 13 x 6.5 – 6, rib tread
Drive: 48 & 54: 23 x 9.5 – 12, 60: 24 x 12.0 – 12

Fuel System: 10.4 US gal (37.85 l)

GENERAL INFORMATION

Safety Features Standard foldable ROPS with seat belt. Operator presence system connected to seat, deck clutch and park brake switches. Stabilizer wheels at rear of lawn mower.

Side discharge deck with discharge chute and rear discharge deck with deflectors.

Seat Deluxe vinyl seat with armrests. Fore and aft sliding adjustment.

Construction Main frame is 1.5 in x 2.0 in x .188 in square steel tubing. Front caster wheels mounted with sealed ball bearings on each wheel. Front caster forks are .375 in (.95 cm) steel

Controls Hand-operated choke, throttle, ignition switch, electric mower clutch. Integrated parking brakes

Indicators Engine warning light (low oil pressure)

Cup Holder Cup holder molded into the left side fuel tank.

ROPS Certified, 2-post, foldable ROPS with seatbelt.

DIMENSIONS

Height 53.00 in (133.35 cm) With ROPS folded
71.25 in (172.47 cm) With ROPS up

W/48 Side-Discharge Deck

Length: 80.8 in (205.23 cm)
Overall width: 53.50 in (135.89 cm) w/discharge chute up
Tire-to-tire width: 47 in (119.38 cm)

Weight: 1200 lbs (544 kg)

W/54 Side-Discharge Deck

Length: 80.8 in (205.23 cm)
Overall width: 59.25 in (150.50 cm) w/discharge chute up
Tire-to-tire width: 47 in (129.54 cm)

Weight: 1210 lbs (548 kg)

W/60 Side-Discharge Deck

Length: 83.25 in (211.46 cm)
Overall width: 66 in (168 cm) w/discharge chute up
Tire-to-tire width: 54 in (137.6 cm)

Weight: 1260 lbs (571 kg)

DECKS

Side-Discharge 48", 54" or 60"

Rear-Discharge 54", 60"

Type Free-floating deck using three blades with center blade to the front. Includes 3 deck-mounted rollers to improve flotation in rolling and uneven terrain.

Deck Lift Raise and lower deck from driver's seat with simple foot-operated deck height adjustment. Pin for setting height, transport position. Change cutting heights, climbing curbs and trailer more easily.

Construction Welded steel. Solid 1.5 in x .375 (2.55 cm x .95 cm) steel bars reinforce impact areas on trim edges. Commercial style, box section reinforced front edge. Reinforcements welded onto spindle mount areas. High density, rubberized discharge chute.

Cutting Heights Foot-operated deck height adjustment. Pin for setting height, detent for transport position. Height adjustment in .25 in increments from 1.0 in to 5.5 in (3.81 cm to 13.97 cm)

Mowing Blades Heavy-duty, heat-treated, high-lift steel Fusion™ blades. Fusion blades feature an exclusive electro-fusion technology that creates an ultra-hard layer at the blade's cutting edge, the blade remains sharp and continues to give a clean cut far longer than any blade on the market.

48 in: 16.5 in x 2.5 in x .20 in
54 in: 18.5 in x 2.5 in x .20 in
60 in: 20.5 in x 2.5 in x .20 in

Blade Tip Speed (at 3600 RPM engine speed)

Side-Discharge	Rear-Discharge
48 in: 18,580 fpm	54 in: 18,580 fpm
54 in: 18,410 fpm	60 in: 18,410 fpm

Deck Drive Single V-belt drive from engine with electric clutch to all three spindles. Spring tension idler and large pulleys to extend belt life.

Spindles Ductile iron casting with steel shafts and sealed ball bearings

Width of Cut

Side-Discharge	Rear-Discharge
48 in: 47.25 in	54 in: 53.10 in
54 in: 53.25 in	60 in: 59.10 in
60 in: 59.25 in	60 in: 59.10 in

Trim Capacity (left side)

48 in: 0.5 in (1.25 cm) w/9.5 in tire = 0.75 in (1.90 cm)
54 in: 2.5 in (6.5 cm) w/9.5 in tire = 4.75 in (12.06 cm)
60 in: 5.9 in (15 cm) w/12 in tire = 5.75 in (14.60 cm)

Specifications subject to change without notice. Go to www.hustlerturf.com for most current specifications.

ACCESSORIES

Flex Forks™ Shock-absorbing front caster forks for a smooth ride and smoother cut.

Mulch Kit Recycles clippings under deck allowing clippings to be cut and recut, then discharged down into the grass. Reduces handling of clippings, improves appearance, and recycles nutrients back to the soil.

Catcher Commercial-duty, 12 bushel, rear-mounted, three-bag catcher.

No-Flat Caster Tires (Semi Pneumatic)

Gator™ Blades Patented mulching blade design.

Wavy Blades Improved performance for mulching.

Other Accessories Light Kit, Steering Lever Extension Kit, Optional Rear Anti-Scalp wheel, Stripe Kit, Hitch Kit, Sand Kit, Suspension Kit for seat.

Personalized Bumper Have your name laser-cut into the rear bumper of your mower. Ask your dealer for details.



CATCHER



FLEX FORKS

32

HUSTLER DIESEL Z

ENGINE SPECS

Shibaura 25 HP

Starter 12-volt
Ignition Compression
Charging System 12-volt, 40-amp alternator
Type Liquid-cooled, inline, 3-cylinder, naturally aspirated industrial diesel engine
Injection System Bosch in-line
Fuel #2 diesel
Air Filter Heavy-duty air cleaner to extend the service interval for excessive, dirty applications and improved performance
Oil Filter Remote-mounted, spin-on engine oil filter (oil pan and filter can be drained into a single drain container for easy maintenance and minimal clean up) 5.1 qt (4.8 l) oil capacity
Cooling Liquid cooled. Direct-driven, mechanical cooling fan
Governor Mechanical governor

TRACTION DRIVE SYSTEM

Type Dual hydrostatic. Tandem pump power two direct-drive wheel motors. Hydrostatic system operates on 20W50 motor oil.
Pump Tandem variable displacement, axial-piston type. Each pump powers, one drive-wheel motor. Hydro-Gear PW 21cc pump
Pump Drive Pumps are driven directly from crankshaft with a micro-V-belt.
Hydraulic Lines Stainless-steel, high-pressure lines with Parker SealLok™ O-Ring Face-Seal fittings.
Cooling Large capacity cooler with 8 inch fan for extended hydraulic life
Filter 40 micron in tank
Ground Speed Infinitely variable: 0-12 mph (0-19.3 kph) forward, 0-7 mph (0-11 kph) reverse
Steering SmoothTrak™ twin-lever steering with patented automatic park brake system provides independent control of each drive wheel. Speed, forward, reverse, brake, and turns are all controlled with hand-operated controls
Turning Radius True zero turning radius. Turns within its own length. Counter-rotating, independent drive wheels
Brakes Service: Hydrostatic dynamic braking
 Parking: Internal friction brake in each PRM wheel motor

Tires Front: 13 x 6.50 – 6, rib tread
 Drive: 23 x 9.50 – 12, turf tread (54" deck)
 24 x 12 – 12, turf tread (with 60 in – 72 in deck)
Capacities
 Fuel System: 14.4 US gal (54.5 l)
 Hydraulic Oil: 7 qts (6.6 l)
 Engine Coolant: 6 US qts (5.7 l)

GENERAL INFORMATION

Safety Features Standard foldable ROPS with seat belt. Operator presence system connected to seat, deck clutch and park brake switches. Stabilizer wheels at rear of lawn mower. Side discharge deck with discharge chute and rear discharge deck with deflectors.
Seat Suspension, molded-vinyl, adjustable seat with arm-rests. Fore and aft adjustment
Construction Main frame is 1.5 in x 3 in x .187 in (3.8 cm x 7.62 cm x .47 cm) rectangular steel tubing Drive motors mounted to 7 ga (.45 cm) welded steel Front caster wheels mounted with roller bearings on each wheel. Front caster forks are .5 in (1.27 cm) steel
Deck Lift Foot-operated deck height adjustment. Pin for setting height, detent for transport position
Controls Hand-operated throttle, ignition switch, electric mower clutch. Integrated parking brakes.
Indicators Hour meter, high temp light, oil pressure light, charge light, glow plug light, audible alarm for high engine temperature and low oil pressure, electronic fuel gauge for each tank.
Cup Holder Two cup holders molded into the left side fuel tank. Accommodates nearly any cup size.

DIMENSIONS

Height 51 in (130 cm) ROPS folded down
 69 in (175 cm) ROPS up
W/54 in XR-7 Deck
 Length: 86 in (218 cm)
 Overall width: 55 in (140 cm) w/discharge chute up
 Tire-to-tire width: 52 in (140 cm)
 Weight: 1568 lbs (711 kg)
W/60 in XR-7 Deck
 Length: 86 in (218 cm)
 Overall width: 61 in (155 cm) w/discharge chute up
 Tire-to-tire width: 56 in (142 cm)
 Weight: 1600 lbs (726 kg)
W/66 in XR-7 Deck
 Length: 88 in (224 cm)
 Overall width: 67 in (170 cm) w/discharge chute up
 Tire-to-tire width: 56 in (142 cm)
 Weight: 1642 lbs (745 kg)
W/72 in XR-7 Deck
 Length: 90 in (229 cm)
 Overall width: 73 in (185 cm) w/discharge chute up
 Tire-to-tire width: 56 in (142 cm)
 Weight: 1684 lbs (764 kg)

DECKS

Side-Discharge 54", 60", 66" or 72" XR-7™
Rear-Discharge 60", or 72"
Type Free-floating deck using three blades with center blade to the front. Mower deck is suspended at the corners. Includes deck-mounted rollers to improve flotation in rolling and uneven terrain.
Deck Lift Raise and lower deck from driver's seat with simple foot-operated deck height adjustment. Pin for setting height, transport position. Change cutting heights, climb curbs and trailer more easily.
Construction 7 ga welded steel. Solid 1 in x .375 in (2.55 cm x .95 cm) steel bars reinforce impact areas on trim edges. .187 in x .375 in (.47 cm x .95 cm) reinforced front edge. Reinforcements welded onto spindle mount areas. Steel deck housing is 5.5 in (14 cm) deep to provide room for high-capacity mowing.

Cutting Heights Foot-operated deck height adjustment. Pin for setting height, detent for transport position. Height adjustment in .25 in increments from 1 in to 5.5 in (2.55 cm to 14 cm).

Mowing Blades Heavy-duty, heat-treated, high-lift steel Fusion™ blades. Fusion blades feature an exclusive electro-fusion technology that creates an ultra-hard layer at the blade's cutting edge, the blade remains sharp and continues to give a clean cut far longer than any blade on the market.
 54 in: 18.50 in x 2.50 in x .203 in flat blade, high sail
 60 in: 20.50 in x 2.50 in x .203 in flat blade, high sail
 66 in: 22.50 in x 2.50 in x .203 in flat blade, high sail
 72 in: 24.50 in x 2.50 in x .230 in flat blade, high sail

Blade Tip Speed	Side Discharge	Rear Discharge
	54 in: 18,322 fpm	
	60 in: 18,260 fpm	60 in: 18,960 fpm
	66 in: 18,960 fpm	
	72 in: 18,890 fpm	72 in: 18,900 fpm

Deck Drive V-belt drive from engine with Warner electric CMS 250 enhanced spot brake clutch to all three spindles. Spring tension idler for extended belt life.
Spindles Machined ductile iron housing, 1.5 in (3.8 cm) dia. high carbon steel shafts and sealed ball bearings.
Discharge Chute Molded Rubber: Over-center design allows for chute to be folded up for improved trailering or to pass thru gates, etc.

Width of Cut

	Side Discharge	Rear Discharge
	54 in: 54 in (137 cm)	
	60 in: 60 in (152 cm)	60 in: 59.10 in (150 cm)
	66 in: 66 in (168 cm)	
	72 in: 72 in (183 cm)	72 in: 69.20 in (176 cm)

Trim Capacity (left side)

	54 in XR-7: 2 in (5.1 cm)
	60 in XR-7: 2.9 in (7 cm)
	66 in XR-7: 5.9 in (15 cm)
	72 in XR-7: 8.9 in (23 cm)

ACCESSORIES

Mulch Kit Recycles clippings under deck allowing clippings to be cut and recut, then discharged down into the grass. Reduces handling of clippings, improves appearance, and recycles nutrients back to the soil.
Light Kit Work all night if you want
Hitch Kit Optional bolt-on hitch with 7/8-inch hole. Will accept any standard ball.
Hour Meter Monitor maintenance intervals
3-Bag Catcher Commercial duty, 12 bushel, rear-mounted, three bag catcher.
Flex Forks™ Shock-absorbing front caster wheel forks for a smooth ride and a smoother cut.
Steering Extension Kit
Striping Kit
Snow Blade
Hydraulic Deck Lift Kit



FLEX FORKS

Specifications subject to change without notice. Go to www.hustlerturf.com for most current specifications.

HUSTLER TRIMSTAR

ENGINE SPECS

Kawasaki FS	16 HP
Kawasaki FS	18 HP
Kawasaki FS	20 HP
Kawasaki FS (Electric Start)	24 HP

Starter Recoil (electric start on 24hp)
Ignition Electronic
Charging System 12-volt (see engine manufacturer specs)
Fuel Unleaded gasoline
Fuel Filter Replaceable, automotive-type
Air Filter Dual-element
Cooling Air cooled. Fly-wheel fan
Governor Mechanical

TRACTION DRIVE SYSTEM

Type Dual hydrostatic. Hydro-Gear ZT 2800. Hydraulic system operates on 20W50 motor oil.
Pump Drive V-belt drive from engine crankshaft
Ground Speed 0-6.3 mph (0-10.1 kmh) forward and 0-2 mph (0-3.2 kph) reverse, infinitely variable

Steering Patented, self-centering H-Bar™ (Hustler Bar) Steering provides independent control of each drive wheel. Speed, forward, reverse, brake, and turns are all controlled with the easy to learn, easy to operate H-Bar Steering.

Turning Radius True zero turning radius. Turns within its own length. Counter-rotating, independent drive wheels

Brakes

Service: Hydrostatic dynamic braking
 Parking: Internal Cog

Tires

Front: Two – 11 x 4 – 4, smooth, semi-pneumatic
 Drive: 18 x 6.50 – 8, turf tread on 36" model
 20 x 10 – 10, turf tread on 48" model
 20 x 10 – 10, turf tread on 54" model

Capacities

Fuel System: 3.6 US gal

GENERAL INFORMATION

Safety Features Operator presence safety-interlock system. Side discharge deck with discharge chute

Construction Mainframe is 1.50 x 2.00 x .120 wall steel tubing. Controls Hand-operated throttle/choke, ignition switch, mower clutch switch

Indicators Hour meter (electric start model has oil pressure warning light)

DIMENSIONS

Height 40.9 in (103.8 cm)

W/36 in Deck

Length: 75 in (190.5 cm)
 Overall Width: 38.0 in (96.5 cm) w/dis chute up
 Tire-to-tire Width: 35 in (88.9 cm)
 Weight: 581 lbs (263.5 kg)

W/48 in Deck

Length: 75 in (190.5 cm)
 Overall Width: 50.4 in (128.02 cm) w/dis chute up
 Tire-to-tire Width: 46.75 in (118.7 cm)
 Weight: 660 lbs (299 kg)

W/54 in Deck

Length: 76.12 in (193.34 cm)
 Overall width: 56.5 in (143.5 cm)
 Tire to Tire: 46.75 in (118.74 cm)
 Weight: 685 lbs (310 kg)

DECKS

Side-Discharge Decks 36", 48" and 54"

Type 36" fixed, side-discharge using two blades. No anti-scalp wheels. 36" decks are suspended by solid links in three places. 48" and 54" free-floating, side-discharge using three blades. Deck-mounted anti-scalp wheels to improve flotation in rolling and uneven terrain. 48/54" decks are suspended by chains in four corners.

Construction 36 in Deck: 7-gauge deck plate with 11-gauge doublers. 48/54 in Deck: 11-gauge deck plate with 11-gauge doublers. 1" x 3/8" steel bar reinforced impact areas on front and trim edges, heavily-reinforced front edge. Lifetime warranty on leading edge of deck. Deck housing is 4 in deep to provide room for high-capacity mowing discharge side

Cutting Heights Hand operated deck-lift in .25 in increments from 1.5 in to 4.5 in (.1 cm increments, 3.18 cm to 11.43 cm)

Main Blades Heavy-duty, heat-treated, 10B38 steel blades

36 in Deck 20.5 in x 2.50 in x .204 in RH blade
 13.75 in x 2.50 in x .204 in LH blade
48 in Deck 16.5 in x 2.50 in x .204 in
54 in Deck 18.5 in x 2.50 in x .204 in

Mowing Blades Heavy-duty, heat-treated, high-lift steel Fusion™ blades. Fusion blades feature an exclusive electro-fusion technology that creates an ultra-hard layer at the blade's cutting edge, the blade remains sharp and continues to give a clean cut far longer than any blade on the market.

Blade Tip Speed 36 in: 18,400 fpm
 48 in: 18,600 fpm
 54 in: 18,920 fpm

Deck Drive V-belt drive from engine with electric clutch to spindles. Spring tension idler pulley.

Spindles Aluminum casting with steel shafts and sealed ball bearings

Trim Capacity (left side): 36 in Deck: 0 in (0 cm)
 48 in Deck: 1.2 in (5.08 cm)
 54 in Deck: 5 in (12.7 cm)

ACCESSORIES

Mulch Kit Recycles clippings under deck allowing clippings to be cut and recut, then discharged down into grass. Reduces handling of clippings, improves appearance, and recycles nutrients back to the soil.

Deck-Mounted Catcher Easily-installed, side-mounted catcher holds 3.5 bushels.

Roll-On™ Striping Sulky A stand-on sulky that features a striping roller instead of tires. Produces beautiful striping results because weight of operator improves striping performance. Compatible with after-market sulkies and trailers.



CATCHER



ROLL-ON STRIPING SULKY

MOWER COMPARISON



SUPER Z



X-ONE

Warranty	3 year, no hour limit - limited OR 5 year, 500 hour - limited 5 year, 3000 hour - pumps and motors Lifetime, frame and leading edge of deck - limited	2 year, no hour limit - limited OR 5 year, 500 hour - limited Lifetime, frame and leading edge of deck - limited
Cutting Widths	60", 66" & 72" Side discharge / 60", 72" Rear Discharge	48", 54" & 60" Side Discharge / 54" & 60" Rear Discharge
Engine Configurations	31hp Kawasaki FX 37hp Kawasaki FX 27hp Kohler Command 29hp Kohler Command EFI	24hp Kawasaki FX 26hp Kawasaki FX 31hp Kawasaki FX 25hp Kohler Command 27hp Kohler Command
Ignition	Electronic	Electronic
Deck System	Foot-operated deck height adjustment. Pin for setting height, detent for transport position. Height adjustment in .25 in increments from 1 in to 5.5 in (2.55 cm to 13.97 cm)	Foot-operated deck height adjustment. Pin for setting height, detent for transport position. Height adjustment in .25 in increments from 1 in to 5.5 in (2.55 cm to 13.97 cm)
Ground Speed	Forward 0-15 mph (0-22.53 kph) Reverse 0-7.5 mph (0-12.07 kph)	Forward 0-11 mph (0-17.7 kph) Reverse 0-6 mph (0-9.66 kph)
Drive System	Dual hydrostatic. Individual pumps power two direct-drive wheel motors. Hydrostatic system operates on 15W50 Mobil 1 synthetic motor oil. Transmission drive (oil) cooler for increased system life. Two variable displacement, slipper piston pumps. Each pump powers one drive-wheel. Sauer Danfoss DDC-20 pump.	Dual hydrostatic. Individual pumps power two direct-drive wheel motors. Hydrostatic system operates on 20W50 motor oil. Two variable displacement, axial-piston pumps. Each pump powers one drive-wheel motor. Hydro-Gear PK 12cc Pump
Fuel Capacity	12 US gal (45.43 L)	10.4 US gal (39.37 L)
Seat	Super deluxe seat with armrests. Fore and aft adjustment. OR Molded vinyl suspension seat with armrests Fore and aft adjustment.	Deluxe vinyl seat with armrests. Fore and aft sliding adjustment.
Drive Tires	24 x 12 - 12, turf tread	48, 54 in: 23 x 9.5 - 12, turf tread 60 in: 24 x 12.0 - 12, turf tread
Caster Tires	13 x 6.50 - 6, smooth tread, semi pneumatic	13 x 6.5 - 6, rib tread
Accessories	Mulch Kit, Gator™ Blades, Wavy Blades, 3-Bag Catcher, Steering Extension Kit, Light Kit, Hitch Kit, Hydraulic Deck Lift, Pneumatic Tire, Striping Kit, Rear Anti-Scalp wheel, Sand Kit, Flex Forks™	Mulch Kit, Hitch Kit, No-Flat Caster Tires, Gator™ Blades, 3-Bag Catcher, Wavy Blades, Suspension Kit for seat, Optional Rear Anti-Scalp wheel, Sand Kit, Steering Extension Kit, Light Kit, Personalized Bumper, Striping Kit, Flex Forks™



DIESEL Z



TRIMSTAR

2 year, no hour limit - limited OR 4 year, 500 hour limit - limited Lifetime, frame and leading edge of deck - limited	2 year, parts and labor - limited Lifetime on leading edge of deck - limited
54", 60", 66" & 72" Side Discharge / 60" & 72" Rear Discharge	36", 48" & 54" Side Discharge
25hp Shibaura	16hp Kawasaki FS 18hp Kawasaki FS 20hp Kawasaki FS 24hp Kawasaki FS (Electric Start)
Electronic	Electronic
Foot-operated deck height adjustment. Pin for setting height, detent for transport position. Height adjustment in .25 in increments from 1 in to 5.5 in (2.55 cm to 14 cm)	Foot-operated deck height adjustment. Pin for setting height, detent for transport position. Height adjustment in .25 in increments from 1.5 in to 4.5 in (3.81 cm to 11.43 cm)
Forward 0-12 mph (0-19.3 kph) Reverse 0-7 mph (0-11 kph)	Forward 0-6.3 mph (0-10.1 kph) Reverse 0-2 mph (0-3.2 kph)
Dual hydrostatic. Tandem pump power two direct-drive wheel motors. Hydrostatic system operates on 20W50 motor oil. Tandem variable displacement, axial-piston pump. Each pump powers, one drive-wheel motor. Hydro-Gear PW 21cc pump	Dual hydrostatic. Hydro-Gear ZT 2800 pump. Hydraulic system operates on 20W50 motor oil
14.4 US gal (54.5 L)	3.6 US gal (13.6 L)
Suspension, molded-vinyl, adjustable seat with armrests. Fore and aft adjustment	None
60, 66, 72 in: 24 x 12 - 12, turf tread	36 in: 18 x 6.50 - 8, turf tread 48-54 in: 20 x 10 - 10, turf tread
13 x 6.5 - 6, rib tread	11 x 4 - 4, smooth, semi-pneumatic
Mulch Kit, Hitch Kit, 3-Bag Catcher, Hour Meter, Steering Extension Kit, Light Kit, Striping Kit, Snow Blade, Hydraulic Deck Lift Kit, Flex Forks™	Mulch Kit, Roll-On™ Striping Sulky, 48/54 Deck-Mounted Catcher

COMPARISON

AFTERMARKET MAKE THE MOST OF YOUR HUSTLER.



- All-in-one unit that will lift any Hustler Mower
- Fold flat to a 6" height for easy storage
- Lifting capacity of 750 lbs



MoJackPRO

www.themojack.com



Electric Broadcast Spreader



Tine Rake Dethatcher

www.jrcoinc.com



CLEAR SNOW FAST AND EASY WITH A WIDE VARIETY OF BLADES

Poly Hydraulic Blades - 60", 66", 72" Wide

2-Stage Snow Blower - 48", 60" Wide

www.kayecorp.com



POWER & DURABILITY

- Stays Sharp Twice as Long
- Exclusive electrofusion technology gives Fusion® blades their superior edge
- The difference is in the blade, not on the blade
- Fusion® blades stay sharper, and hold their clean-cutting edge longer
- You'll get the same high quality of cut all day long
- Heat-treated hardness throughout the body of the blade

Ask your Hustler dealer for replacement blades (which come standard from the factory).